# **KR415 Interface Conveyor**


Allows bindery equipment to seamlessly run product into Kirk-Rudy inkjet printing systems, tabbing systems and other products.

- With
  Built-in
  Bump turn
- Integrated bump turn (right or left hand)
- Top belt mechanism for smooth product transfer
- Easy adjustable table heigth
- Runs in-line with most bindery equipment

## **Bring Kirk-Rudy** equipment in-line with other systems



- ✓ Easy set-up
- ✓ Heavy Duty

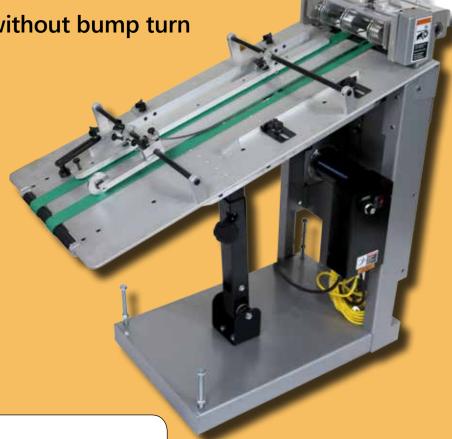

Ph: 770.427.4203



### **KR415**

## **Interface Conveyor**

## Easy product transition to existing Kirk-Rudy equipment

#### **FEATURES:**

- Right or left hand bump turn
- Can be used without bumpturn
- · No tools, easy height adjustment
- Quick release top belt control
- Variable speed control

Optional left hand configuration available.



## \*\* General Specifications

### **Product Size (with bump turn)**

• • •		
Width	Min 2" (51 mm)	Max 10.5" (266 mm)
Length	Min 5" (127 mm)	Max 12" (305 mm)
Thickness	Min .01" (.25 mm)	Max .188" (4.7 mm)

#### **Product Size (no bump turn, straight thru)**

	• •	
Width	Min 2" (51 mm)	Max 11.5" (292.1 mm)
Length	Min 5" (127 mm)	Max 17" (431.8 mm)
Thickness	Min .01" (.25 mm)	Max .188" (4.7 mm)

Physical	English	Metric
1 (1.	26.6"	01.44

Length	36.6"	91.44 cm
Width	18″	45.72 cm
Height (tabletop)	33.3"	84.58 cm
Height Infeed Down	19.5″	49.5 cm
Height Infeed Up	33.3"	84.58 cm
Weight	225 lbs.	102 kg.

#### **Electrical Requirements**

Voltage	Amp	Phase	Hz
120 VAC	5	1	60/50

#### **Operating Speeds**

Maximum	550 feet/min. (167.64 meters/min.)
---------	------------------------------------

Note: Speeds are dependent on material being fed



\*\*Specifications subject to change without notice.

Ph: 770.427.4203 www.kirkrudy.com