

KR519G

Transport Base with Gantry



Vacuum Transport Base

This industrial grade gantry base is designed to easily mount almost any type of labeler or print and apply applicator. The KR519 Vacuum Base is modular in design allowing for quick and easy in-line placement with Kirk-Rudy or other OEM equipment.

- Extruded aluminium T-slot rails
- 18" wide rollers for better product transfer
- Engineered to reduce vibration



- ✓ ***Stainless Steel Tabletop***
- ✓ ***Maintenance Free Drive***
- ✓ ***Heavy Duty***



Ph: 770.427.4203

www.kirkrudy.com

KR519G

Vacuum Transport Base with Gantry


Modular designed to be placed in-line Kirk-Rudy and other OEM equipment.

FEATURES:

- Optimized encoder mount and drive
- Toothless belted drive reduces vibration
- Torque limiting drive
- Pallet jack/fork lift base clearance
- Top side belt adjustment
- Quick and easy belt replacement

OPTIONS:

- Divert
- Vacuum control configurations
- Feeder interface
- Conveyor interface with speed up
- Adjustable angle feeder mount
- Belted or infeed registration
- Infeed double detect & jam detect
- Hydra-lift (5" height adjustment)
- Camera/Verification systems
- Right or left product flow
- Belts widths: .75", 1.25", 3", 10", 18"
- Infeed and outfeed extensions

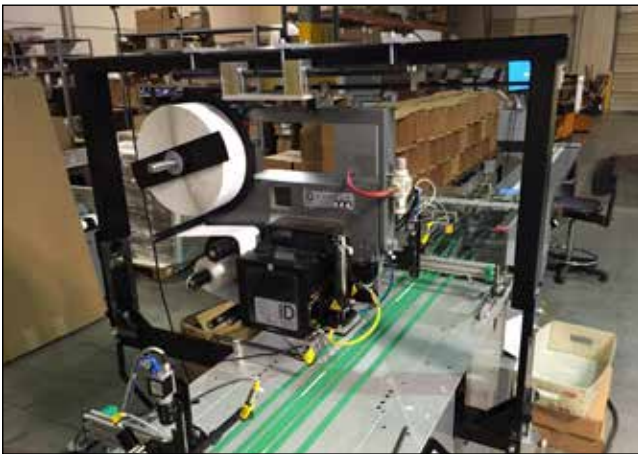

Label applicator mounted on gantry

Custom configurations available

DIMENSIONS	INCHES	CENTIMETERS
LENGTH	34, 43, 54, 70, 92	86, 109, 137, 178, 234 cm
WIDTH	45	114
TABLETOP HEIGHT	33.25	84.5

ELECTRICAL REQUIREMENTS			
VOLTAGE	AMPS	PHASE	Hz
110 V	20	1	50/60
220 V	30	1	50/60

PRODUCT CAPACITY		
	MINIMUM	MAXIMUM
WIDTH	1.25" (3.2 cm)	22" (56 cm)
LENGTH	3" (8.9 cm)	17" (43 cm)
THICKNESS	.007" (0.18 mm)	1" (2.5 cm)

SPEED	
MAXIMUM	600 fpm (Optional 1000 fpm)

Speeds dependent on material being fed.
Specifications subject to change.

